


# ALL CITY FENCE CO.

*SURROUND YOURSELF WITH THE BEST*

## GATE AUTOMATION



# ALL CITY FENCE CO.

ALL CITY

**SAVE up to**  
**\$3,000<sup>00</sup>!**

For more than 50 years Burdick's Security & All City Fence have been exceeding their customers' needs and building solid reputations in their respective fields of expertise.



**Burdick's Security**  
"Peace Of Mind Since 1959"



**DKS™**  
DOORKING®, INC.

**IEI** Now Part of **Linear®**  
Building On Innovation.

**AMERISTAR®**

**HySecurity**  
Simple. Reliable. Secure.®

**BETAFENCE**  
USA  
MANUFACTURED BY PAYNE

## COMBINE YOUR FENCE, GATE, SECURITY & AUTOMATION NEEDS AND SAVE TODAY!

# ALL CITY FENCE CO.

"Seattle's Largest & Best Specialty Fence Contractor"

**CALL TODAY: 206-324-3747**  
36 S. Hudson St. Seattle, WA 98134

**ALLCITYFENCE.COM**



**Burdick's Security**  
"Peace Of Mind Since 1959"

**CALL TODAY: 206-725-6072**  
4700 Rainier Ave. S. Seattle, WA 98118

**BurdickSecurity.com**





### DoorKing Vehicular Gate Operators

#### Gate Operators

1150 Overhead  
 6002 Light Duty Actuator  
 6003 Residential Actuator  
 6050/6100 Residential and Commercial  
 6300 Commercial and Industrial  
 6400 In-ground  
 6500 Commercial and Industrial  
 9000 Commercial and Industrial  
 9050 Residential  
 9100 Commercial  
 9150 Commercial and Industrial  
 9210, 9220, 9230 Variable Speed  
 9500 Maximum Security  
 9310 Commercial and Industrial  
 Accessories  
 >>V-Wheel  
 >>Interior Access

1150



6002



6003



6050 / 6100



6300



6400



6500



9000



9050



9100



9150



9310



9210 / 9220 / 9230

9500

**Accessories****V-Wheels****Interior Access**

DoorKing provides a family of vehicular gate operator products and accessories for residential, commercial, industrial and maximum security applications. DoorKing gate operators designed for general access applications (9050, 9070, 9100, 9150) utilize a unique fail-safe entrapment prevention design that exceeds the requirements of the UL 325 safety standard. Most gate operators simply "lock-up" when an entrapment condition exist and require a crank, key or other release device to free the entrapment. When a DKS gate operator senses an entrapment, two important things happen:

1. The gate operator stops and activates an alarm as required by the UL safety standard.
2. The gate operator assumes a fail-safe condition that releases pressure on the gate and allows the entrapment the opportunity to free itself without outside intervention. This feature exceeds current industry safety standards.



# SlideDriver™

Industrial, government, aviation, military, corporate, commercial, correctional facility


As the original ultra-reliable and secure hydraulic slide gate operator, SlideDriver™ is chosen for thousands of secure sites nationwide. Fully enclosed hydraulic motors drive a rigid drive rail passing between two compressed polyurethane wheels. Few moving parts. Lasts decades.

**Site:** Mission critical high security and reliability. High cycle. Light to extremely heavy gates. Very long gates. Crash gates. Any gate style. Quick open. Low maintenance.

**Typical Sites:** Airport, government, freight handling, nuclear, power, railway, military base, embassy, water treatment, petrochemical, correctional facility, law enforcement, port, sports arena.


**Operator:** Continuous duty. Hydraulic. Smart Touch Controller with diagnostics and integrated security reporting. 1 to 3 ft/s, up to 20,000 lb gate. Gate length limited only by weight. All voltage/phases. Steel cover. Out-of-box synchronization with all HySecurity operators for master-slave, sally port or other specialized, multiple operator applications.

**Options:** HY-5A intelligent vehicle detectors, 12 inch base riser, tamper proof heavy gauge cover, cabinet lock, specialty gate locking kits, UPS battery backup, Emergency Fast Operate, snowbrush kit, custom colors, more. Compatible with all available access control, safety, vehicle detection and many other accessories.

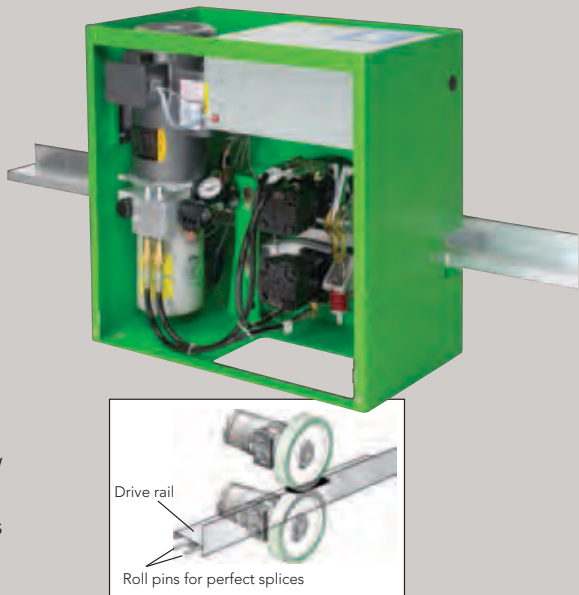

Power transmission: hydraulic motors to drive rail. Polyurethane drive wheel tread eliminates the high wear, metal-to-metal contact of conventional chain-drive systems.

## SlideDriver™ Gate System

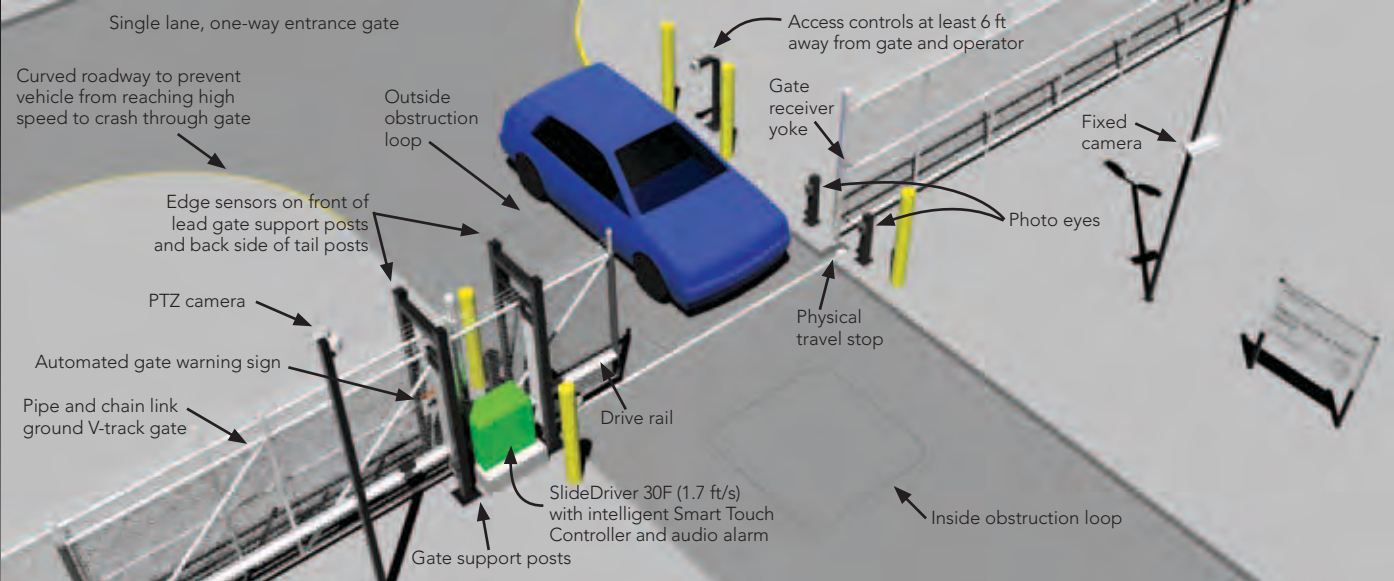

SlideDriver gate system with some required and optional accessories.



Utilities – Oklahoma



Correctional Facility – California



Aviation – Oklahoma

### Special Models

**Fast Models:** Available in fast, 2 to 3 ft/s models for high security, non-public applications (UL Class III, IV).

**Emergency Fast Operate:** Normal operation opens and closes gate at 2 ft/s. In emergency situation, press and hold button for Emergency Fast Close at 3 ft/s (UL Class III, IV).

**UPS Backup:** Full functionality and 3000 ft backup travel during AC Power outage using DC power from two 110 Ah batteries and a 25 A charger. The ultimate in reliable security.

**Correctional Facility:** Heavier, 10 gauge cover with high security lock for added protection. Program for sally port, external lock mechanisms, and gate position indicator. Available with an optional internal deadbolt

gate lock.

**Modular:** Electrical control box, pump, and motor assembly are remotely located in a separate metal enclosure. The only equipment left in the SlideDriver chassis are quiet wheel assemblies, hydraulic motors, and limit switches. Normally chosen for high security sites or where extremely quiet operation is necessary.

|                 | 1,000 lb Gates<br>1 ft/s               | 3,000 lb gates<br>1.7 ft/s             | 4,000 lb Gates<br>1 ft/s               | 5,000 lb gates<br>2.2 ft/s             | 5,000 lb gates<br>2.2 ft/s<br>EFO 3 ft/s     | 5,000 lb gates<br>3 ft/s               | 8,000 lb gates<br>1 ft/s               | 20,000 lb gates<br>1 ft/s              |
|-----------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|
| Model           | SlideDriver 10                         | SlideDriver 30F                        | SlideDriver 40                         | SlideDriver 50VF2                      | SlideDriver 50VF2-EFO                        | SlideDriver 50VF3                      | SlideDriver 80                         | SlideDriver 200                        |
| Part #          | 222 SS ST                              | 222 EX 1.7 ST                          | 222 E ST                               | 222 X2 ST                              | 222 X2EFO ST                                 | 222 X3 ST                              | 222 X1 ST                              | 444 XS ST                              |
| Duty Cycle      | Continuous                             | Continuous                             | Continuous                             | Continuous                             | Continuous                                   | Continuous                             | Continuous                             | Continuous                             |
| Horsepower      | 1 hp                                   | 2 hp                                   | 1 hp                                   | 2 hp                                   | 2 hp                                         | 2 hp                                   | 2 hp                                   | 5 hp                                   |
| Drive Wheels    | Two 6" wheels                          | Two 6" wheels                          | Two 6" wheels                          | Two 8" wheels                          | Two 8" wheels                                | Two 8" wheels                          | Two 8" wheels                          | Four 8" wheels                         |
| Gate Weight     | 1,000 lb gate max.                     | 3,000 lb gate max.                     | 4,000 lb gate max.                     | 5,000 lb gate max.                     | 5,000 lb gate max.                           | 5,000 lb gate max.                     | 8,000 lb gate max.                     | 20,000 lb gate max.                    |
| Gate Length     | Limited only by weight                 | Limited only by weight                 | Limited only by weight                 | Limited only by weight                 | Limited only by weight                       | Limited only by weight                 | Limited only by weight                 | Limited only by weight                 |
| Drawbar Pull    | 300 lb                                 | 300 lb                                 | 300 lb                                 | 300 lb                                 | 300 lb                                       | 300 lb                                 | 600 lb                                 | 1,200 lb                               |
| Rate of Travel  | 1 ft/s                                 | 1.7 ft/s                               | 1 ft/s                                 | 2.2 ft/s                               | 2.2 ft/s with Emergency Fast Close at 3 ft/s | 3 ft/s                                 | 1 ft/s                                 | 1 ft/s                                 |
| 1 Phase Voltage | 115/208/230 60 Hz<br>110/220 50 Hz     | 208/230 60 Hz<br>220 50 Hz             | 115/208/230 60 Hz<br>110/220 50 Hz     | 208/230 60 Hz<br>220 50 Hz             | 208/230 60 Hz<br>220 50 Hz                   | 208/230 60 Hz<br>220 50 Hz             | 208/230 60 Hz<br>220 50 Hz             | 230 60 Hz                              |
| 3 Phase Voltage | 208/230/460/575 60 Hz<br>220/385 50 Hz | 208/230/460/575 60 Hz<br>220/385 50 Hz | 208/230/460/575 60 Hz<br>220/385 50 Hz | 208/230/460/575 60 Hz<br>220/385 50 Hz | 208/230/460/575 60 Hz<br>220/385 50 Hz       | 208/230/460/575 60 Hz<br>220/385 50 Hz | 208/230/460/575 60 Hz<br>220/385 50 Hz | 208/230/460/575 60 Hz<br>220/385 50 Hz |
| UL 325 Listing  | Usage Class I, II, III, IV             | Usage Class III, IV                    | Usage Class I, II, III, IV             | Usage Class III, IV                    | Usage Class III, IV                          | Usage Class III, IV                    | Usage Class III, IV                    | Usage Class III, IV                    |
| Warranty        | 5 year                                 | 5 year                                 | 5 year                                 | 5 year                                 | 5 year                                       | 5 year                                 | 5 year                                 | 5 year                                 |

|                             |                    |                     |                    |                     |                         |                     |                    |                     |
|-----------------------------|--------------------|---------------------|--------------------|---------------------|-------------------------|---------------------|--------------------|---------------------|
| Additional models available |                    |                     |                    |                     |                         |                     |                    |                     |
| UPS Backup                  | SlideDriver 10 UPS | SlideDriver 30F UPS | SlideDriver 40 UPS | –                   | –                       | –                   | SlideDriver 80 UPS | SlideDriver 200 UPS |
| Correctional Facility       | –                  | SlideDriver 30F-C   | SlideDriver 40-C   | SlideDriver 50VF2-C | SlideDriver 50VF2-EFO-C | SlideDriver 50VF3-C | SlideDriver 80-C   | SlideDriver 200-C   |
| Modular                     | SlideDriver 10-M   | SlideDriver 30F-M   | SlideDriver 40-M   | SlideDriver 50VF2-M | SlideDriver 50VF2-EFO-M | SlideDriver 50VF3-M | SlideDriver 80-M   | SlideDriver 200-M   |



United Nations – New York

# SwingRiser™

Industrial, government, military, corporate, commercial, residential

SwingRiser™ opens gates with an elegant lift and swing movement, raising the gate panel a full 12 inches during the gate opening cycle. Lifting clears obstacles like snow, rocks, curbs, and gradient differences. SwingRiser's locking pin secures the gate as it drops into a roadway locking receptacle when the gate gently lowers at the end of its cycle.

**Site:** Ultra high security and reliability. High cycle. Large, heavy gates. Utility or elegant. Pipe and steel, aluminum, chain link, ornamental iron, crash gates, more.

**Typical Sites:** Port, railway, embassy, gated community, sports/entertainment, VIP estate.


**Operator:** Hydraulic. Smart Touch Controller with diagnostics and integrated security reporting. 14 to 30 second open. Up to 3,000 lb/gate leaf. 90° or 100°, in or out swing. All voltages/phases. Continuous duty. Out-of-box synchronization with all HySecurity operators for master-slave, sally port or other specialized, multiple operator applications.

**Options:** HY-5A intelligent vehicle detectors, UPS battery backup, custom post height, compatible with all available access control, safety, vehicle detection and many other accessories.



HYDRAULIC

## SwingRiser™ Gate System

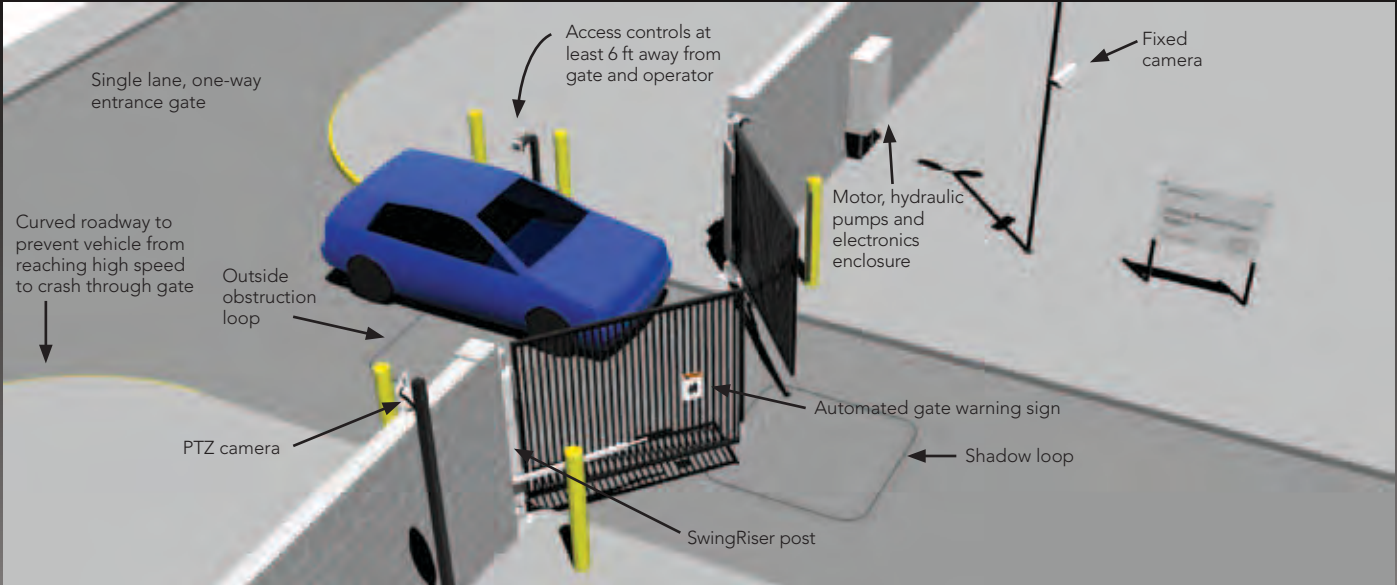

SwingRiser gate system with some required and optional accessories.



Railroad – Washington



Residential – Arizona




Military Crash Gate –West Virginia

### Special Models

**Twin:** SwingRiser Twin models use one electric motor, one hydrasupply and one remote enclosure to open and close two gates simultaneously, reducing the overall system cost considerably. SwingRiser comes standard with a mechanical lock via hydraulics and a locking pin and receptacle, virtually eliminating the need for optional external locks.

**Leaf Delay:** Some two-gate swing operators require independent operation, with one delayed leaf operation to allow for special locking mechanisms or to facilitate an aesthetic one leaf folding over the other close cycle. This requires two separate operators, each with its own electric motor, hydrasupply and remote enclosure. Programming the Smart Touch Controllers defines the length of leaf delay.

**UPS Backup:** All SwingRiser UPS models provide full functionality during AC power outage using DC power from uninterruptible power supply batteries (UPS). 100-cycle backup provided by two 110 Ah batteries and a 25 A charger. The ultimate in reliable security.

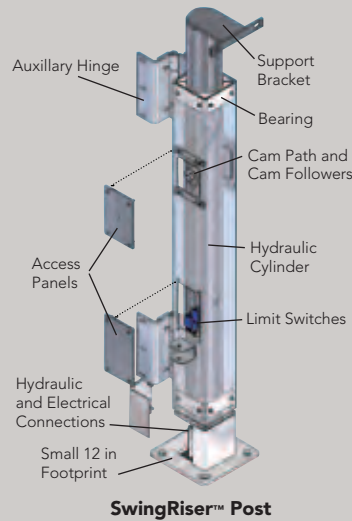



SwingRiser™ Post

HYDRAULIC

|                 | 1,000 lb gate, 14 second open          |                                        | 1,600 lb gate, 19 second open          |                                        | 3,000 lb gate, 30 second open          |                                        |
|-----------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|
|                 | Single leaf                            | Twin                                   | Single Leaf                            | Twin                                   | Single Leaf                            | Twin                                   |
| Model           | SwingRiser 14                          | SwingRiser 14 Twin                     | SwingRiser 19                          | SwingRiser 19 Twin                     | SwingRiser 30                          | SwingRiser 30 Twin                     |
| Part #          | HRG 220-A ST                           | HRG 222-A ST                           | HRG 220-B ST                           | HRG 222-B ST                           | HRG 220-C ST                           | HRG 222-C ST                           |
| Duty Cycle      | Continuous                             | Continuous                             | Continuous                             | Continuous                             | Continuous                             | Continuous                             |
| Horsepower      | 1 hp                                   | 2 hp                                   | 1 hp                                   | 2 hp                                   | 1 hp                                   | 2hp                                    |
| Drive           | Hydraulic cylinder                     | Hydraulic cylinder                     | Hydraulic cylinder                     | Hydraulic cylinder                     | Hydraulic cylinder                     | Hydraulic cylinder                     |
| Gate Size       | up to 9 ft wide                        | up to 9 ft wide each leaf              | up to 16 ft wide                       | up to 16 ft wide each leaf             | up to 16 ft wide                       | up to 16 ft wide each leaf             |
| Gate Weight     | 1,000 lb                               | 1,000 lb/leaf                          | 1,600 lb                               | 1,600 lb/leaf                          | 3,000 lb                               | 3,000 lb/leaf                          |
| Open/Close Time | 14 seconds                             | 14 seconds                             | 19 seconds                             | 19 seconds                             | 30 seconds                             | 30 seconds                             |
| 1 Phase Voltage | 115/208/230 60 Hz<br>110/220 50 Hz     | 208/230 60 Hz<br>220 50 Hz             | 115/208/230 60 Hz<br>110/220 50 Hz     | 208/230 60 Hz<br>220 50 Hz             | 115/208/230 60 Hz<br>110/220 50 Hz     | 208/230 60 Hz<br>220 50 Hz             |
| 3 Phase Voltage | 208/230/460/575 60 Hz<br>220/380 50 Hz | 208/230/460/575 60 Hz<br>220/380 50 Hz | 208/230/460/575 60 Hz<br>220/380 50 Hz | 208/230/460/575 60 Hz<br>220/380 50 Hz | 208/230/460/575 60 Hz<br>220/380 50 Hz | 208/230/460/575 60 Hz<br>220/380 50 Hz |
| UL 325 Listing  | Usage Class I, II, III, IV             | Usage Class I, II, III, IV             | Usage Class I, II, III, IV             | Usage Class I, II, III, IV             | Usage Class I, II, III, IV             | Usage Class I, II, III, IV             |
| Warranty        | 5 year                                 | 5 year                                 | 5 year                                 | 5 year                                 | 5 year                                 | 5 year                                 |

Additional models available

| UPS Backup | SwingRiser 14 UPS | SwingRiser 14 Twin UPS | SwingRiser 19 UPS | SwingRiser 19 Twin UPS | SwingRiser 30 UPS | SwingRiser 30 Twin UPS |
|------------|-------------------|------------------------|-------------------|------------------------|-------------------|------------------------|
|------------|-------------------|------------------------|-------------------|------------------------|-------------------|------------------------|

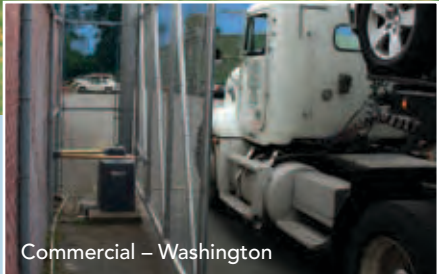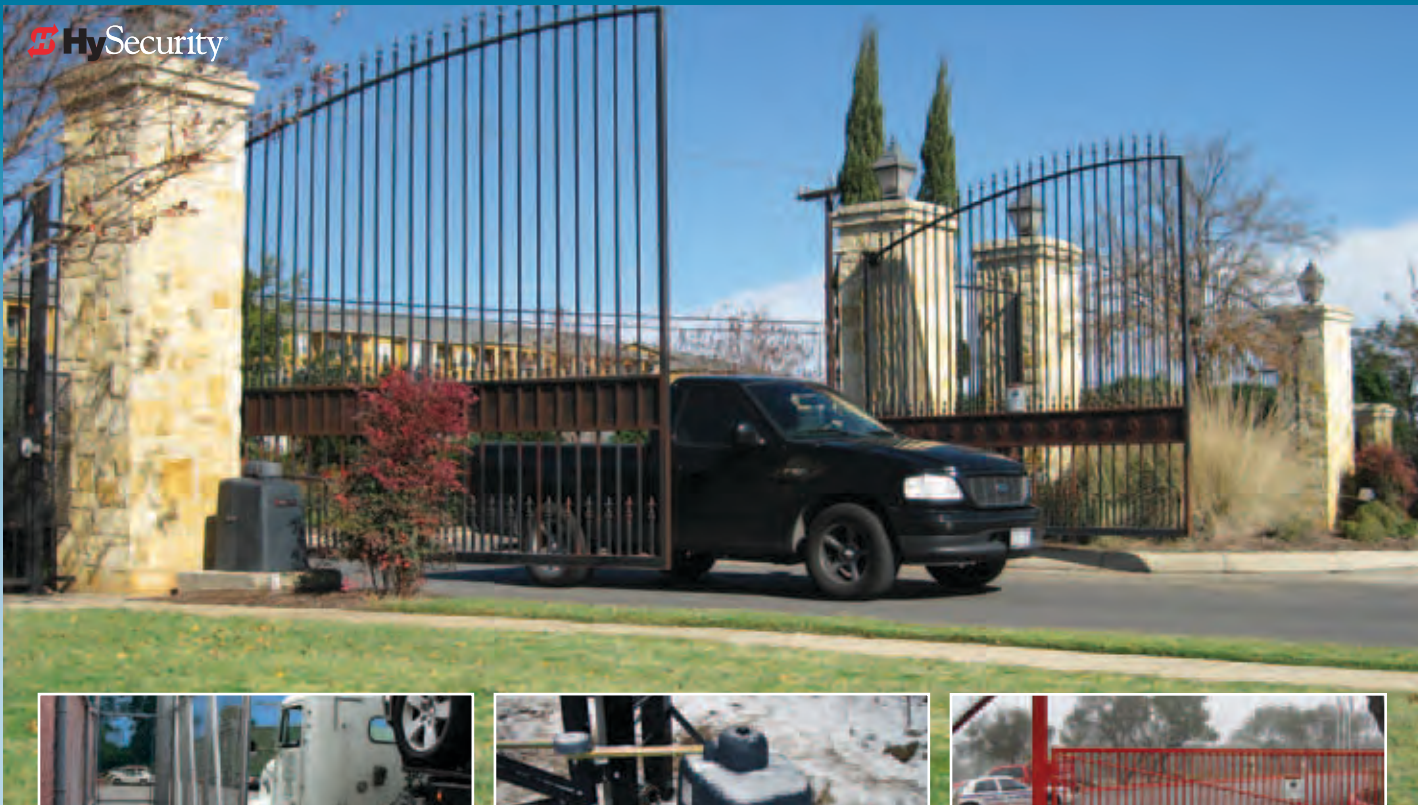

Commercial – Washington



Residential – Minnesota



Commercial – Texas

## Electromechanical Swing and Slide Gate Operators for Residential and Commercial Sites

### Ultra Reliability

Field tested in the coldest, hottest, most humid, windy, and brutal environments.

### Locking Cover and Robust Chassis

Most moving parts are protected from vandalism and tampering by the heavy duty, key-locked cover. Robust, low flex chassis meets the most demanding site, climate and usage demands.

### UPS Backup

Supports normal full system gate operation for days after AC power loss.

### Adjustable Speed

Individual programming of open and close speeds from 10 to 15 seconds for swing gates and 0.75 to 2.25 ft/s for slide gates.

### Intelligence and Full Security Integration

All HySecurity operators offer industry leading site intelligence and security system integration (USB, RS-232, RS-485, and optional Ethernet). The Smart DC Controller, HySecurity's next generation intelligent controller, offering easy dual gate synchronization, alert, fault and error reporting, maximized battery life, and 32 character LCD screen.

### Smart DC Controller

32 character LCD on control board provides troubleshooting and programming instructions in plain English. Program using 5 tact buttons on control board or connect to laptop computer to program and report.




## SwingSmart

UPS backup, pad mounted, variable speed swing gate operator for residential and commercial applications



Commercial – Texas

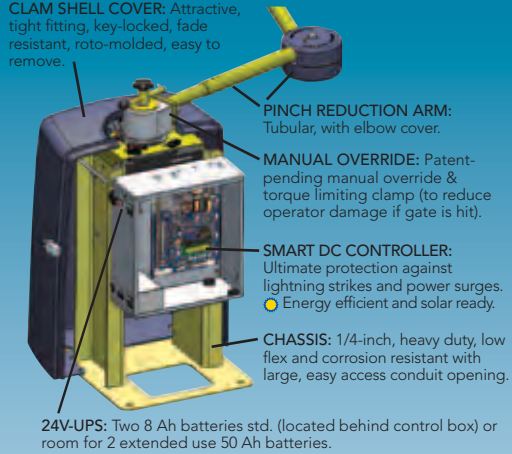


| Standard Model  | SwingSmart DC 20                                               |
|-----------------|----------------------------------------------------------------|
| Solar Model     | SwingSmart DCS 20                                              |
| Max Gate Weight | 1,300 lb (590 kg)*                                             |
| Max Gate Length | 20 ft leaf (6 m)*                                              |
| Open/Close Time | Adjustable 10 to 15 seconds<br>Open/Close speed set separately |
| Duty Cycle      | Continuous                                                     |
| Temp. Rating    | -13°F to 158°F (-25°C to 70°C)                                 |
| Certification   | 500,000 cycles                                                 |
| Voltage Input   | 115V or 230V, 50/60 Hz                                         |
| Accessory Power | 12VDC and 24VDC and 24VAC<br>1 A each                          |
| Communication   | USB, RS-232, RS-485, Ethernet option                           |
| UL 325 Listing  | Usage Class I, II, III, IV                                     |
| Warranty        | 5 year (7 year single-family residential)                      |

\*Gate capacities: 1,300 lb (590 kg) for a 12 ft (4 m) gate; 800 lb (363 kg) for a 16 ft (5 m) gate; 600 lb (272 kg) for a 20 ft (6 m) gate

## SlideSmart

UPS backup, chain driven, variable speed slide gate operator for residential and commercial applications

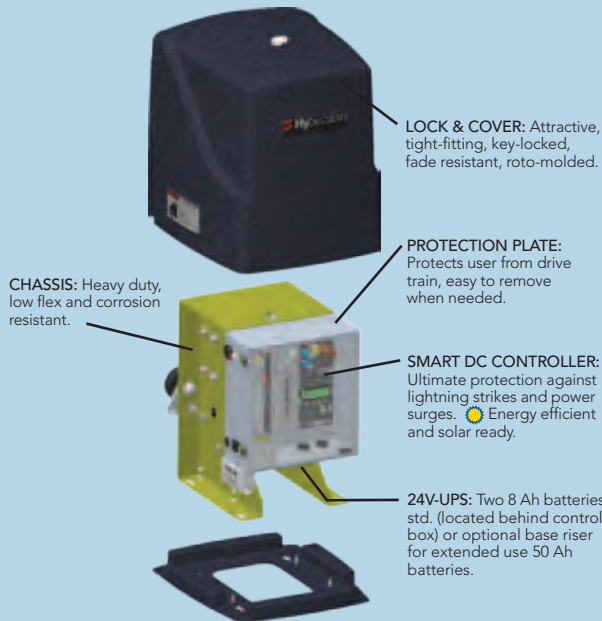

| Standard Model  | SlideSmart DC 15                                                     | SlideSmart DC 10F                                                    |
|-----------------|----------------------------------------------------------------------|----------------------------------------------------------------------|
| Solar Model     | SlideSmart DCS 15                                                    | SlideSmart DCS 10F                                                   |
| Max Gate Weight | 1,500 lb (682 kg)                                                    | 1,000 lb (455 kg)                                                    |
| Max Gate Length | 40 ft (12 m)                                                         | 40 ft (12 m)                                                         |
| Rate of Travel  | 0.75 to 1.25 ft/s (23 to 38 cm/s)<br>Open/Close speed set separately | 1.75 to 2.25 ft/s (53 to 69 cm/s)<br>Open/Close speed set separately |
| Duty Cycle      | Continuous                                                           | Continuous                                                           |
| Temp. Rating    | -13°F to 158°F (-25°C to 70°C)                                       | -13°F to 158°F (-25°C to 70°C)                                       |
| Voltage Input   | 115V or 230V, 50/60 Hz                                               | 115V or 230V, 50/60 Hz                                               |
| Accessory Power | 12VDC and 24VDC and 24VAC<br>1 A each                                | 12VDC and 24VDC and 24VAC<br>1 A each                                |
| Communication   | USB, RS-232, RS-485, Ethernet option                                 | USB, RS-232, RS-485, Ethernet option                                 |
| UL 325 Listing  | Usage Class I, II, III, IV*                                          | Usage Class III, IV**                                                |
| Warranty        | 5 year (7 year single-family residential)                            | 5 year (7 year single-family residential)                            |

\*Speed setting cannot exceed 1 ft/s for Class I and II usage.

\*\*Not for residential use or applications intended to serve the general public.



# The Standard Of Excellence



**Betafence USA** continues to lead the industry in the manufacturing of high quality ornamental fencing. Our welded ornamental panels and gates demonstrate consistent performance for many years because of our commitment to the best metal materials and coatings, and superior workmanship.

*Recommended for:*

- Office Buildings
- Transportation Projects
- Sports Facilities
- Schools and Universities
- Apartments and Condos
- Government Buildings
- Industrial Facilities

## BENEFITS

### Wide Selection Of Styles

We offer welded ornamental fencing for Commercial, Industrial and Security projects, with panel styles and gates to meet any architectural and security requirements.

### Strength

Our welded ornamental panels and gates are made with only the highest quality galvanized steel tubing, manufactured using post-consumer and post-industrial steel scrap.

### Custom Capabilities

Betafence USA has redefined the notion of custom fencing, with our approach to consultative customer service and design, resulting in award winning fence projects.

### Superior Coating

Betafence USA's exclusive Architectural Grade Powder Coating protects panels and gates from weather and U.V. aging, ensuring they will retain their beauty and structural integrity for many years, with a minimum of upkeep or maintenance.



**B** **BETAFENCE**  
**USA**  
MANUFACTURED BY PAYNE



### Panels

Our Welded Ornamental panels are manufactured using the highest-strength steel pickets and rails, and are available in a wide range of sizes and styles.

### Posts

Panels are attached with high-strength steel brackets to galvanized and powder-coated square tubular steel posts.

### Gates

Choose from the widest available range of gate offerings, including opening configurations: Swing, Slide or Cantilever.

### Coating

Welded Ornamental panels and gates feature a six-step pre-treatment process, then finished with an Architectural Grade Powder Coat. This super-durable coating is environmentally sound and provides longer protection from U.V. rays and salt spray than either E-Coat or standard polyester coatings.

### Colors

Welded Ornamental panels and gates are available standard with black coating. Additional colors, including custom matches, are available.




### Warranty

Our Welded Ornamental is backed by a 20-Year Manufacturer's Warranty, giving you the peace of mind that the world's leading producer of fencing stands behind this product.



## Welded Ornamental Specifications

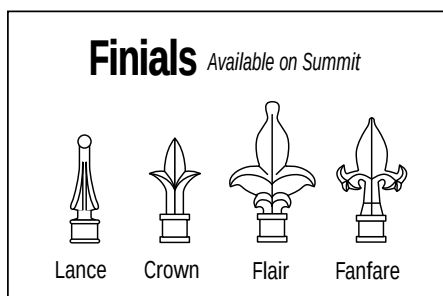

| Grade                      | Residential   | Commercial      | Industrial  |
|----------------------------|---------------|-----------------|-------------|
| Panel Width                | 8'            | 8'              | 8'          |
| Panel Height               | 3' - 6'       | 3' - 8'         | 3' - 20'    |
| Pickets                    | 5/8" - 18 ga. | 3/4" - 16 ga.   | 1" - 16 ga. |
| Rails                      | 1" - 16 ga.   | 1 1/2" - 16 ga. | 2" - 16 ga. |
| Pinnacle (Press Point Top) | Standard      | Standard        | Standard    |
| Landmark (Rail Top)        | Available     | Available       | Available   |
| Summit (Extended Picket)   | Available     | Available       | Available   |
| Defender (Security Arch)   | -             | Available       | Available   |

**Contact Us** 3309 SW Interstate 45  
Ennis, TX 75119  
888-650-4766 - toll free  
(972) 878-7000 - phone  
(972) 878-4703 - fax  
[Fence@BetafenceUSA.com](mailto:Fence@BetafenceUSA.com)  
[www.BetafenceUSA.com](http://www.BetafenceUSA.com)



**B** **BETAFENCE**  
**USA**

MANUFACTURED BY PAYNE

# Grand Estate

## THE NEW FACE OF ORNAMENTAL ENTRY GATES

For over 20 years Ameristar's Estate Gate has been the industry standard for upgrading the appeal of a driveway or estate entrance. Demand for customized and personalized entry gates has increased, driving Ameristar to craft gates that are more in tune with its customer's requirements. Ameristar's Grand Estate entry gates are hand crafted to fulfill the desire for any customized estate entrance.

### GRAND ESTATE ENTRY GATES

- HAND FORGED SCROLLWORK
- DISTINCT PANEL INFILL
- INTRICATE ORNAMENTATION
- HEAVY STEEL FABRICATION
- 3 SERIES OF DESIGN

### *TUSCAN VILLA SERIES*



AMF-4



AMF-6



AMF-2



AMF-1



AMF-5



AMF-3



# Grand Estate

## ORNAMENTAL ENTRY GATES


### OXFORD MANOR SERIES



AMP-6




AMP-3

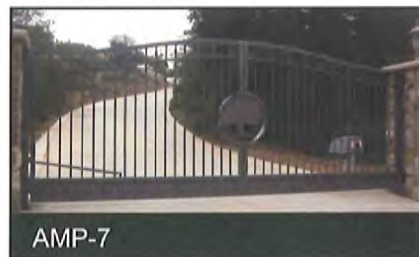


AMP-7



AMP-1

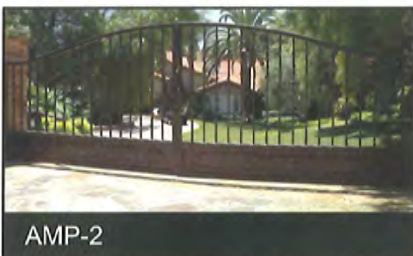

AMP-2

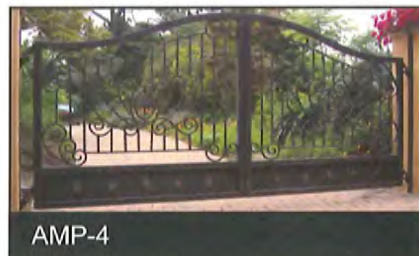

AMP-4

### FRENCH QUARTER SERIES



AMO-1



AM0-10




AMO-11



AMO-2



AMO-3

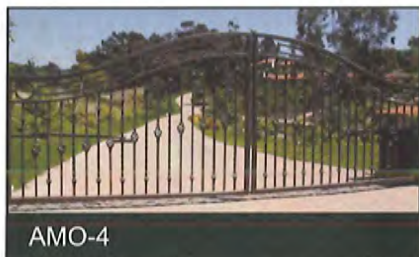

AMO-4

Effective: 02/2011 Part #:XXXX

AMERISTAR FENCE PRODUCTS  
1555 N. MINGO RD.  
TULSA, OK 74116



PH. 888-333-3422  
MKTG@AMERISTARFENCE.COM